

Member State of OIML  
Germany



OIML Certificate N°  
R60/2000-DE1-09.17

## OIML CERTIFICATE OF CONFORMITY

### Issuing Authority

Name: Physikalisch-Technische Bundesanstalt  
Address: Bundesallee 100, 38116 Braunschweig  
Person responsible: Dr. Panagiotis Zervos

### Applicant

Name: Keli Electric Manufacturing (Ningbo) Co. Ltd.  
Address: NO. 199 Changxing Road  
315033 Ningbo, Jiangbei District  
  
China

Manufacturer of the certified type is the applicant.

### Identification of the certified type

Strain gauge double bending beam load cell  
Type: UDA  
  
Further characteristics see page 2

This Certificate attests the conformity of the above identified type (represented by the sample or samples identified in the associated Test Report) with the requirements of the following Recommendation of the International Organization of Legal Metrology (OIML):

**R60**, edition 2000  
for accuracy class C3

This Certificate relates only to the metrological and technical characteristics of the type of instrument covered by the relevant OIML Recommendation identified above.

This Certificate does not bestow any form of legal international approval.

The conformity was established by the results of tests and examinations provided in the associated Test Report

No. 1.12-4040888-1 that includes 22 pages


**The Issuing Authority**



Dr. P. Zervos  
Direktor und Professor

23.06.2009

**The OIML Member**

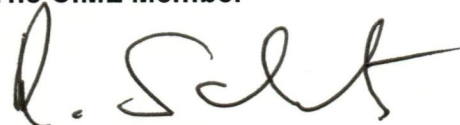

Dr. R. Schwartz  
Direktor und Professor

23.06.2009

The load cells (LC) of the series UDA are double bending beam load cells made of aluminium. The strain gauge application is potted.

The metrological characteristics for application in approved weighing instruments are listed in table 1.

Table 1: Essential data

|   |                                  |      |                                   |
|---|----------------------------------|------|-----------------------------------|
| Accuracy class                          |                                  |      | C3                                |
| Maximum number of load cell intervals   | $n_{LC}$                         |      | 3000                              |
| Rated output                            |                                  | mV/V | 2                                 |
| Maximum capacity                        | $E_{max}$                        | kg   | 150 / 200 / 250 / 300 / 500 / 750 |
| Minimum load cell verification interval | $V_{min} = (E_{max} / Y)$        |      | $E_{max} / 15000$                 |
| Minimum dead load output return         | $DR = (\frac{1}{2} E_{max} / Z)$ |      | $\frac{1}{2} E_{max} / 5000$      |

Dead load:  $0\% \cdot E_{max}$ ; Safe overload:  $150\% \cdot E_{max}$ ; Input impedance:  $404 \Omega$ ; Fraction:  $p_{LC} = 0.7$

*Important note:* Apart from the mention of the Certificate's reference number and the name of the OIML Member State in which the Certificate is issued, partial quotation of the Certificate and of the associated Test Report is not permitted, although either may be reproduced in full.