



KL/JT-QSMC-H50t~200t.0A

额定载荷 Rated load	50、100、150、200t
精度等级 Accuracy class	0.3
灵敏度 Sensitivity	2.0±0.005mV/V
线性误差 Non-linearity	±0.3%F.S
滞后误差 Hysteresis error	±0.3%F.S
蠕变 (30分钟) Creep(30min)	±0.03%F.S
零点温度影响 TC ZERO	±0.03%F.S/10℃
灵敏度温度影响 TC SPAN	±0.03%F.S/10℃
输入阻抗 Input resistance	800±80Ω
输出阻抗 Output resistance	702±5Ω
绝缘电阻 Insulation resistance	≥5000 MΩ
工作温度范围 Service Temp Range	-10~+200℃
安全负载 Safe load limit	150%F.S
破坏负载 Breaking load	200%F.S
额定激励电压 Nominal of range excitation	10~12 V DC
密封等级 Protection Class	IP67
材料 Material	合金钢 Alloy Steel
电缆 Cable	Length:16m Diameter: Φ6mm

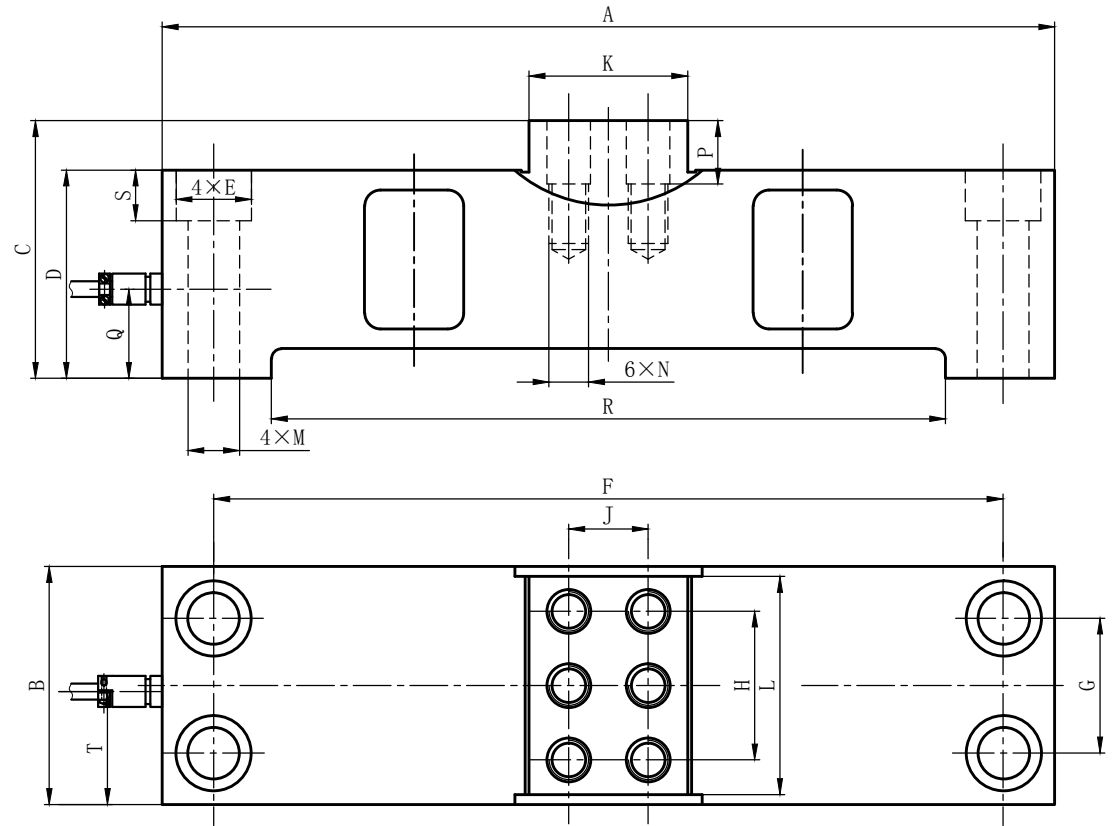

量程 (t)	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T
50	450	120	130	105	Φ38	398	68	75	40	80	110	Φ26	M20 ↓30	32	45	340	25.5	57
100	500	140	143	118	Φ44	444	80	90	44	90	130	Φ30	M24 ↓36	38	54	370	28.5	62
150	560	160	158	133	Φ48	500	94	102	44	90	150	Φ33	M24 ↓36	38	66	410	32	69
200	620	180	175	150	Φ48	560	114	110	44	90	160	Φ33	M24 ↓40	40	75	450	32	76

接线图Wiring Schematic Diagram

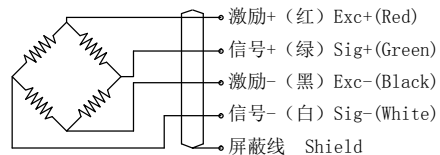

										宁波柯力传感科技股份有限公司				
										QSMC-H50t~200t 安装图				
设计										图样标记	重量	比例		
校对										A				
审核										共张		第张		
工艺												KL/JT-QSMC-H50t~200t.0A		