


额定载荷 Rated load	40kg
精度等级 Accuracy class	1
灵敏度 Sensitivity	1.65±0.005mV/V
线性误差 Non-linearity	1%F.S
滞后误差 Hysteresis error	1%F.S
蠕变 (30 分钟) Creep(30min)	±0.1%F.S
零点温度影响 TC ZERO	±0.1%F.S/10°C
灵敏度温度影响 TC SPAN	±0.1%F.S/10°C
输入阻抗 Input resistance	400±50 Ω
输出阻抗 Output resistance	352±5 Ω
绝缘电阻 Insulation resistance	≥5000 MΩ
额定温度 Nominal Temp Range	-10~+40°C
工作温度范围 Service Temp Range	-30~+70°C
安全负载 Safe load limit	120%F.S
破坏负载 Breaking load	150%F.S
额定激励电压 Nominal of range excitation	10~12 V DC
密封等级 Protection Class	IP66
材料 Material	合金钢 Alloy Steel
电缆 Cable	Length: φ5X5m

接线图Wiring Schematic Diagram

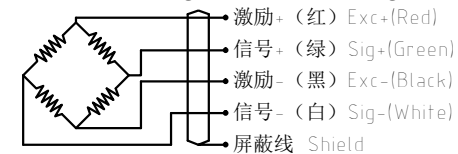

										宁波柯力电气制造有限公司													
										SEBK40kg													
标	记	处	数	分	区	更	改	文	件	号	签	名	年	月	日	图	样	标	记	重	量	比	例
设	计															S							
校	对																						
审	核																						
工	艺																						
										共 张 第 张			KL/JT-SEBK40kg.0A										